




Introducing A New, Thick, Tacky, Dripless, H1 Registered, Food Grade Spray Lubricating Oil

Lubriplate® **FP-150** **Food Machinery Lubricant**

Formulated from Pure USP White Mineral Oil, Lubriplate FP-150 Spray is a clear, thick, tacky, NSF H1 registered food grade lubricating oil for numerous general oiling applications at food and beverage processing facilities. It is ideally suited for the lubrication of proofer chains in baking facilities.

SPECIFICATIONS

NSF CATEGORY CODE	H1
NSF REGISTRATION NUMBER	159263
ISO VISCOSITY GRADE	460
FIRE POINT (ASTM D-92)	455°F / 235°C
BASE OIL	USP WHITE MINERAL OIL
BASE OIL VIS. cSt@40°C (ASTM D-455)	367
PACKAGE 11 OZ / 312 g AEROSOL CAN	PART No. L0735-063

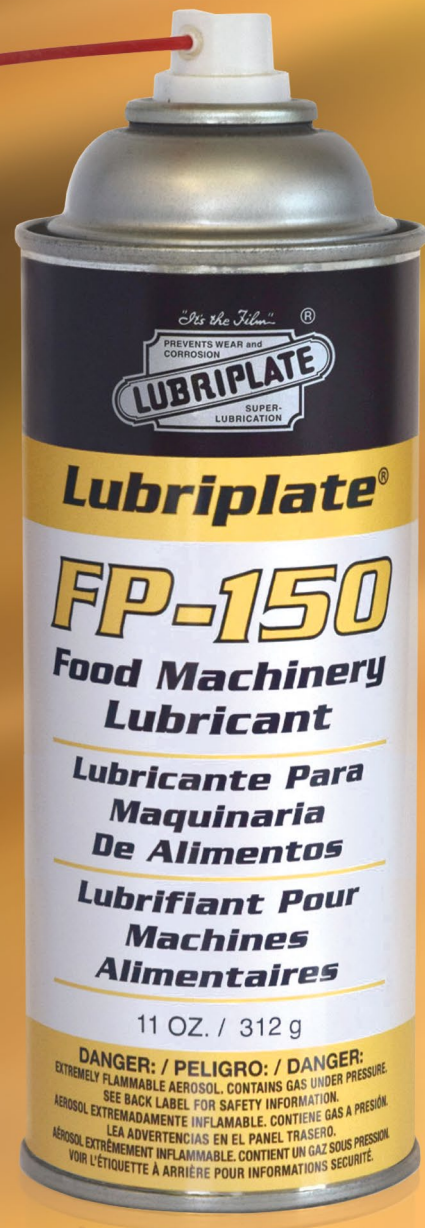

Lubriplate®
Lubricants

Backed By: **Lubriplate®**
ESP

Complimentary Extra Services Package

Plant Surveys / Tech Support / Training
Color Coded Lube Charts & Machine Tags
Lubrication Software / Follow-Up Oil Analysis

Newark, NJ 07105 / Toledo, OH 43605 / 800-733-4755
LubeXpert@lubriplate.com / www.lubriplate.com



The Best Food Machinery Lubricants Also Come In Small Convenient Packages.



SYNXTREME FG-1 & FG-2

NSF H1, High Performance, Extreme Pressure, High Temp, Synthetic, Calcium Sulfonate Complex Greases.

SYNXTREME FG-1 (NLGI No. 1)
CARTRIDGES 15.5 OZ. (440 g)
Part No. L0306-098

SYNXTREME FG-2 (NLGI No. 2)
CARTRIDGES 16 OZ. (454 g)
Part No. L0305-098



SFL-1 & SFL-2

NSF H1, Synthetic, High Performance, Aluminum Complex Type Greases For High / Low Temperature Applications.

SFL-1 (NLGI No. 1)
CARTRIDGES 13.5 OZ. (383 g)
Part No. L0197-098

SFL-2 (NLGI No. 2)
CARTRIDGES 13.5 OZ. (383 g)
Part No. L0198-098



FGL-0, FGL-1 & FGL-2

NSF H1, USP Mineral Oil-Based, Super Multi-Purpose, Aluminum Complex Greases.

FGL-0 (NLGI No. 0)
CARTRIDGES 13 OZ. (369 g)
Part No. L0230-002

FGL-1 (NLGI No. 1)
CARTRIDGES 14 OZ. (397 g)
Part No. L0231-098

FGL-2 (NLGI No. 2)
CARTRIDGES 14 OZ. (397 g)
Part No. L0232-098



SYNXTREME HT MAX

NSF H1 Registered, Ultra High-Temperature Perfluoropolyether PFPE-Based Grease.

SYNXTREME FG-2 (NLGI No. 2)
CARTRIDGES 28 OZ. (794 g)
Part No. L0331-002



PURE TAC & PURE TAC LIGHT

NSF H1, Tacky, Adhesive, USP Mineral Oil-Based, Aluminum Complex Greases. Excellent For Open Gears.

PURE TAC LIGHT (NLGI No. 1.5)
CARTRIDGES 13.5 OZ. (383 g)
Part No. L0235-098

PURE TAC (NLGI No. 2)
CARTRIDGES 14 OZ. (397 g)
Part No. L0236-098



CLEARPLEX, 1 & 2

NSF H1, Clear/Transparent, USP Mineral Oil-Based, Aluminum Complex Greases.

CLEARPLEX TUBE (NLGI No. 1)
TUBES 4 OZ. (113 g)
Part No. L0353-082

CLEARPLEX-1 (NLGI No. 1)
CARTRIDGES 13 OZ. (369 g)
Part No. L0350-098

CLEARPLEX-2 (NLGI No. 2)
CARTRIDGES 13 OZ. (369 g)
Part No. L0351-098



SYNXTREME FG-2 Spray

NSF H1, High Performance, Extreme Pressure, High Temp, Synthetic, Calcium Sulfonate Complex Spray Grease.

SYNXTREME FG-1 Spray
11 OZ. (312 g)
Part No. L0305-063



SFGO Ultra-7 Spray

NSF H1, Synthetic, Multi-Purpose, Chain and Penetrating Fluid.

SFGO ULTRA-7 Spray
11 OZ. (312 g)
Part No. L0912-063



FGL-1 Spray

NSF H1, Anti-Wear Fortified, Multi-Purpose, Spray Grease Type Lubricant.

FGL-1 Spray
11 OZ. (312 g)
Part No. L0231-063



FMO-350AW Spray

NSF H1 Registered, Anti-Wear Fortified, Multi-Purpose, Spray Lubricating Oil.

FMO-350 AW Spray
12 OZ. (340 g)
Part No. L0882-063



Food Grade Silicone Lubricant

NSF H1 Registered, General-Purpose, Silicone Spray Lubricant.

Food Grade Silicone Lubricant
9.5 OZ. (269 g)
Part No. L0723-063



FMO-85AW Spray

NSF H1, Anti-Wear Fortified, Multi-Purpose, Non-Aerosol, Hand Pump Spray Lubricating Oil.

FMO-85 AW Pump Spray
14 FL OZ (414 ml)
Part No. L0880-067

Lubriplate® Lubricants

Newark, NJ 07105 / Toledo, OH 43605 / 800-733-4755 / www.lubriplate.com / LubeXpert@lubriplate.com